

Data Sheet

Switching Power Supply PS-DC0936

GFM

Input: 9..36V DC

Output: 5 V DC

Attributes:

- Screw Connector for Input
- Short-Circuit Proof
- usable for all GFM-5V-Printer
- Nylon-Crimp Connector

Technical Specifications:


Operating Temperature Range: -5.. + 85°C
Storage Temperature Range: -20..+ 85°C

Input:

Input Voltage Range: 9...36 V DC
Input Frequency: 45..50 Hz
Input Nominal Current: 2A/12V

Output:

Output Voltage: 5,0 VDC, 300 mA for logic
5,6 VDC, 3A adjustable
for motor and printhead

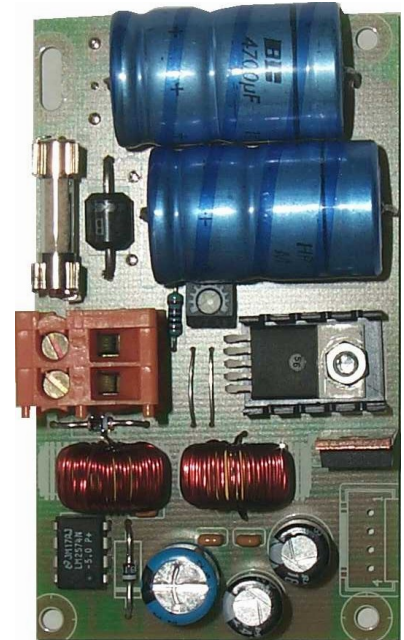

Connectors:

Input: 2-pin screw connector (X1)
Pin 1: +
Pin 2: - (GND)

Output: 4-pin header male RM 2,54 (X2)

Pin description:

4-pin header male (X2) (Standard):

Pin 1: + 5,6 VDC
Pin 2: GND
Pin 3: GND
Pin 4: + 5,0 VDC

Dimensions:

49,5 x 84,4 x 24 mm

Weight:

70 g

Dimensions:

